

FiltraCon®

FiltraCon® A 6 LF



Stainless Steel AISI 316



DANTECH
DANISH TECHNOLOGY CENTER

Complete Standard Modular μ FiltrationSystem


Produced in AISI 316 Stainless Steel

INCL

- > Control Unit
- > Automatic flow adjusting
- > Automatic valves
- > VFD control of ramps and speeds
- > Filtration from 60-3000 Micron
- > Automated cleaning/ forced cleaning
- > By-product pump
- > Uniquely designed inlet and outlet



FiltraCon®

FiltraCon ® A 6 LF

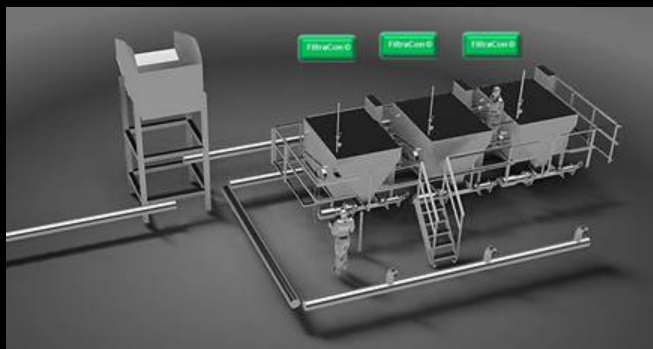

FiltraCon ®A6LF is a compact robust closed standalone MODULAR SYSTEM UNIT

- > Capacity depending on amount solid and size μ belt
- > With high Capacity the Standatd Modular Unit is easy to connected in parallel and adjust to the capacity wanted
- > Can be placed outside or inside the plant
- > *Convert Pollution to Profit*
- > With the Filtration 60 μ in step up to 2000 μ

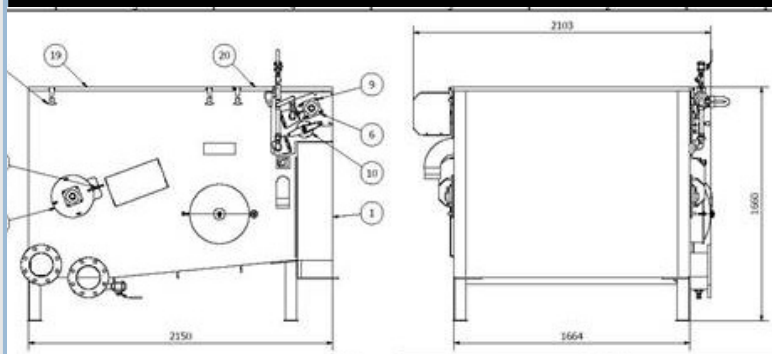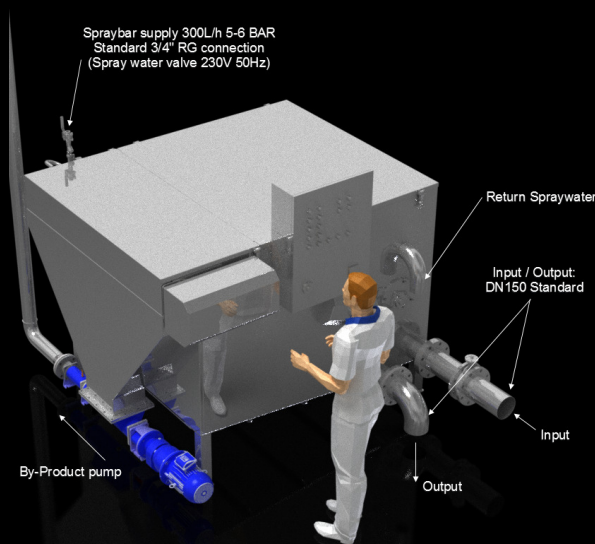

DANTECH
DANISH TECHNOLOGY CENTER

Capacity : up to 200 m³/h depending on the material going on to the system.

Water Supply for Spray Nozzles : 3/4" RG 250L/hr.

Voltage : 3x400 V , 50Hz (60 Hz UL) 30 Amp. Prefuse

Dimension : W x H x L = 2103 x 1669 x 2150 mm

Inlet and Outlet : DN 150 Standard

For further informatin, please contact :

DANTECH

Danish Technology Center

Vedbaek Strandvej 425 - DK-2950 - Denmark - Tel. +45 45 76 36 36

Email: info@dantech.com - www.dantech.com